


Typical Configuration for Vehicle Wash


Name or address _____ Required Minimum Capacity _____

Manhole Rings & Covers placed so all piping is visible for inspection. Plumbing code requires local vent.




Interceptor



Inside wash bay, grated cover maximum 1/2" diameter openings

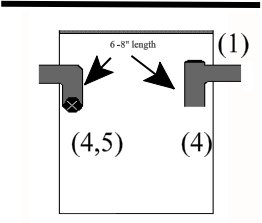


Cover must be water tight when located outside wash bay

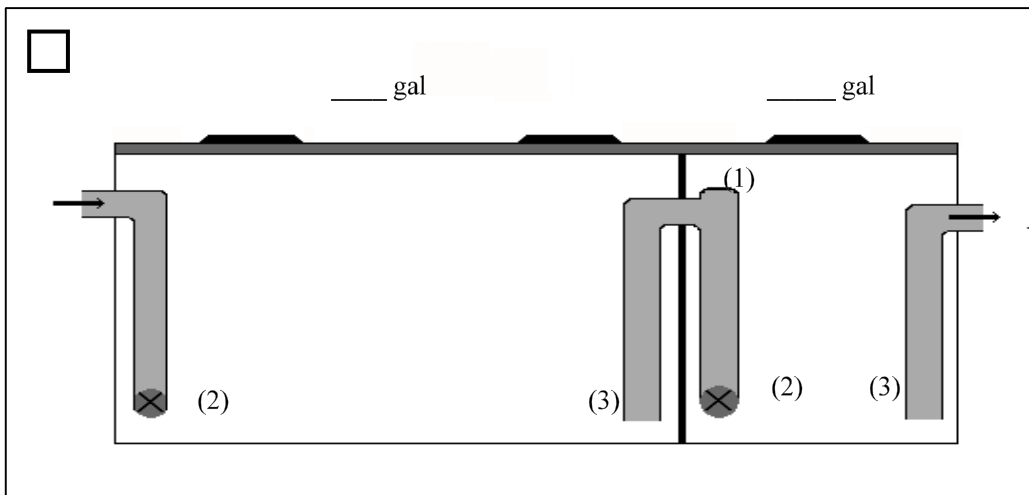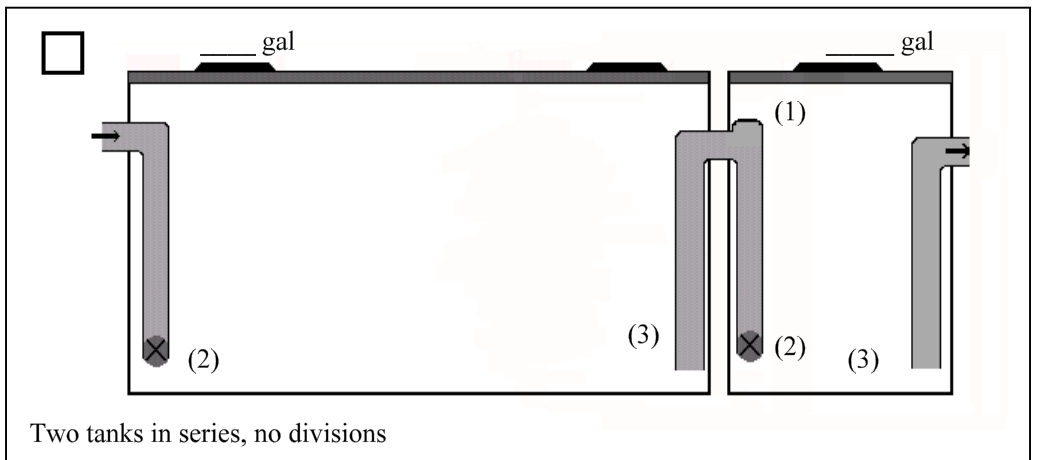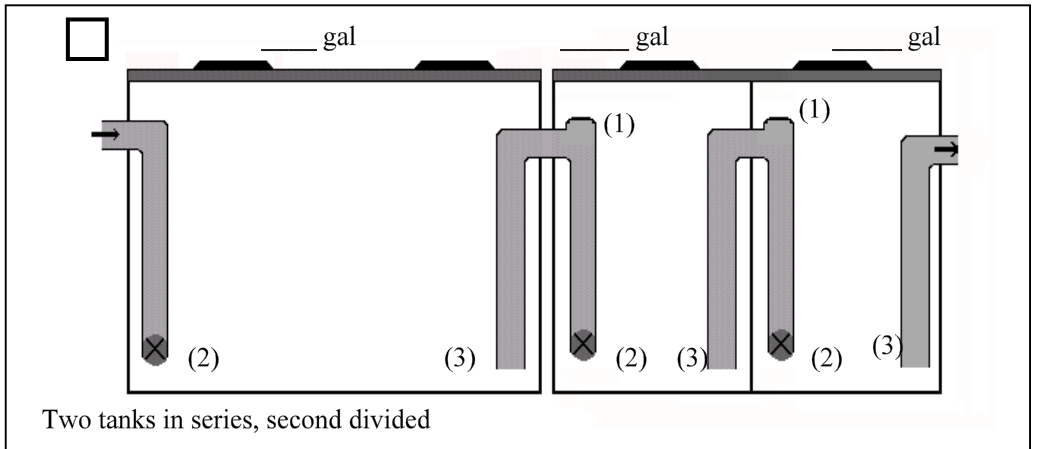


Sampling Manhole

Manhole Ring & Cover



If grade allows, install piping with 5-6" drop, influent to effluent. Grout invert. Water shall not pool in bottom of manhole

Configuration

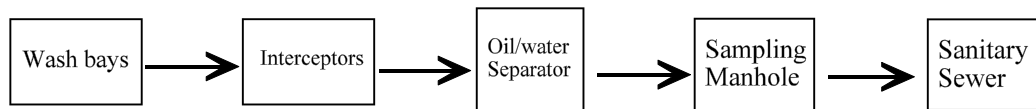

Key

- (1) sanitary tee with screw-on cap
- (2) ≤ 18" from bottom, dbl CO at bottom
- (3) ≤ 12" from bottom
- (4) 6-8" below static water level
- (5) dbl CO at bottom